

Project:

Type:

Qty:



FEATURES



Taking its name from its long slender neck, Goose comes in an 8.5" neck and 4.75" neck.



Offered in a 0° - 45° vertical aiming tilt and 0-355° rotation.



Standard CCTs 27K, 30K, 40K, 50K, 60K




Black and White finish



Beam angles from 15°, 24°, 36°

SPECIFICATIONS

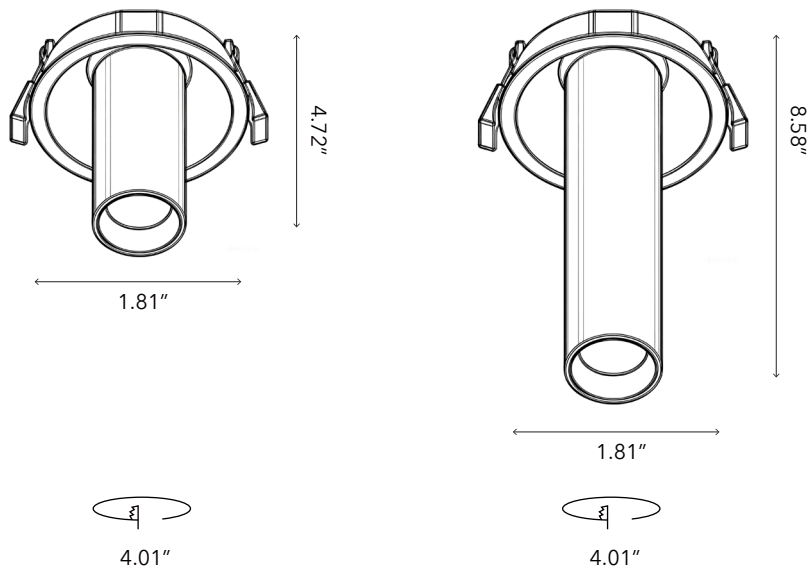

| | |
|------------------|-----------------------------------------------------|
| Input Voltage | 100-277V AC |
| Wattage | 6W |
| Delivered Lumens | 563Lm +/-5% |
| LED | <3-Step MacAdam Ellipse (2-Step Available) |
| CCT | 27K, 30K, 35K, 40K, D2W, TW |
| CRI | >90Ra |
| Adjustability | 15°/24°/36° |
| Lamp Life | Max Tilt Angle 45° / Horizontal Rotation Angle 355° |
| Environment | Trimode Dimming / Triac / 0-10V (100%-1%) |
| Heat Sink | 50,000Hr |
| Trim | IP20 |
| Operating Temp | -4° F - 104° F |

Order Code

ORDER CODE EXAMPLE: GOS-4-T-6W-27K-R36-BL-B-D10-NC

| SERIES | SIZE | TRIM | WATTAGE | CCT | BEAM ANGLE | FINISH | | DIMMING |
|--------|---------|------------|-----------|------------------------------|---------------|----------|-----------|----------------------|
| | | | | | | Finish | Reflector | |
| GOS | 4 4.72" | T Trimmed | 6W 563 Lm | 27K 2700K | R15 15 Degree | WH White | W White | ELV Phase/Triac (3%) |
| | 8 8.58" | L Trimless | | 30K 3000K | R24 24 Degree | BL Black | B Black | D10 0-10V (.1%) |
| | | | | 35K 3500K | R36 36 Degree | | | DAL DALI |
| | | | | 40K 4000K | | | | |
| | | | | TW Tunable White 2700K-6500K | | | | |
| | | | | WD Warm Dim 3000K-1800K | | | | |

INSTALLATION TYPE



EMERGENCY BACKUP

| | | | |
|----|-----------------------|------|------------|
| NC | New Construction Tray | EM10 | 10W/90 Min |
| RM | Remodel (no NC Tray) | | |
| | | | |
| | | | |
| | | | |

| | | |
|----------|-------|------|
| Project: | Type: | Qty: |
|----------|-------|------|

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

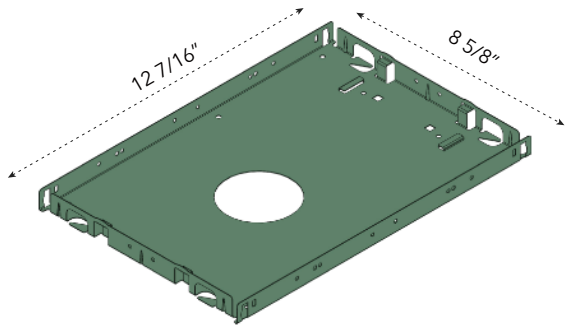



Standard bar hanger (included)
Mounting Length 14 3/4" - 26".
Extension kit can be ordered separately.




Commercial bar hanger #1487
Butterfly and Caterpillar brackets available



New Construction & Remodel Mounting

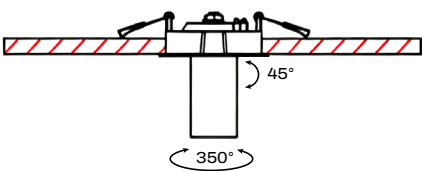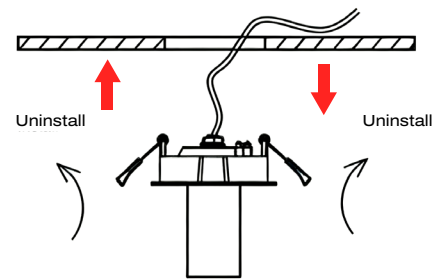

LED Driver Enclosure and Junction Box

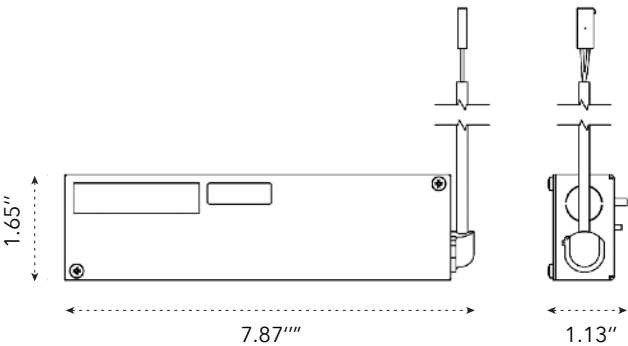

Project:

Type:

Qty:


EMERGENCY

PRIMARY SPECIFICATIONS

| Output Power Max | Input Power | Input Current Max | Emergency Operating Time | Battery | Input Voltage | Output Voltage | Ambient Operating Temperature | UL Listed for Us and Canada |
|------------------|-------------|-------------------|--------------------------|------------------------------|---------------|----------------|-------------------------------|-----------------------------|
| 8W | <5W | 100mA | >90 min | Li-ion 18650 7.4V 2500mAh | 100-277Vac | 15-55Vdc | 0°C through 50°C | CUS |

Dimensions / Weight

| | | | |
|--------|---------|-----------------|--------|
| Length | 12.4" | Height | 1.81" |
| Width | 1.1" | Mounting Length | 11.88" |
| Weight | 1.72 lb | | |

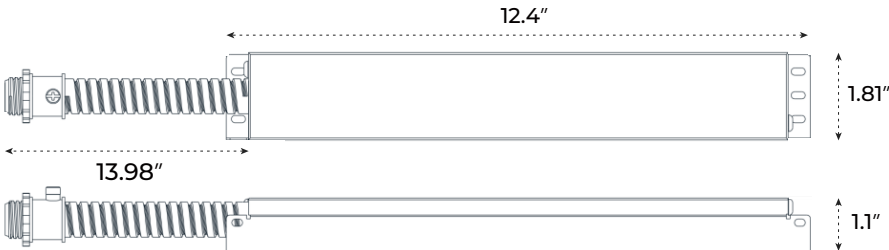

REMOTE TEST SWITCH


The Remote Test Switch may be mounted adjacent to the LED Fixture by others.

EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED Fixture Sizes of 4" and Larger are capable of below ceiling access. IC/ICAT/CP Box and iTS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the Emergency Battery.

REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all Local and National Electric/Building Codes.

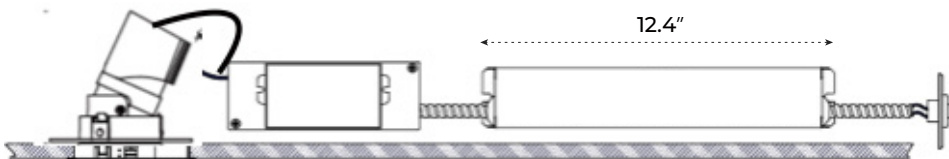

WALL PLATE ACCESSORIES

