

Project:

Type:

Qty:



LineaPro Series  
High-Performance Architectural Linear Luminaires

LineaPro is an IP66-rated family of high-performance linear luminaires designed for exterior architectural lighting. Engineered for AC line voltage operation, the series offers multiple optical distributions, four standard lengths, and an optional anti-glare louver to ensure precise, comfortable, and visually refined illumination. Ideal for façades, landscapes, commercial exteriors, and public spaces.




IP66-rated



multiple choice



Uniform illumination



UNITONE



DYNAMIC WHITE



VARICOLOR

RATINGS



Order Code

ORDER CODE EXAMPLE: LPUT-45W-40K-35D-W-DM-UNV

SERIES	SERIES	CCT	BEAM ANGLE	FINISH	DINMING	FINISH
LPUT	16.14" (20W)	27K 2700K	20D 20 Degree	B Black	DM DMX	120V 120V Only
	23.82" (30W)	30K 3000K	25D 25 Degree	W White	RM RDM	UNV 100-277V
	35.43" (45W)	40K 4000K	35D 35 Degree	GR Grey	PP Pixel per	
	46.85" (60W)	65K 6500K	20*50D 20*50 Degree		FT Foot	
		TW Tunable White 2700K-6500K				
		WD Warm Dim 3000K-1800K				
LPVC	16.14" (20W)	27K 2700K	10D 10 Degree	B Black	DM DMX	120V 120V Only
	23.82" (30W)	30K 3000K	30D 30 Degree	W White	RM RDM	UNV 100-277V
	35.43" (45W)	40K 4000K	60D 60 Degree	GR Grey	PP Pixel per	
	46.85" (60W)	65K 6500K	10*50D 10*50 Degree		FT Foot	
		TW Tunable White 2700K-6500K				
		WD Warm Dim 3000K-1800K				
LPDY	16.14" (20W)	27K 2700K	8D 8 Degree	B Black	DM DMX	120V 120V Only
	23.82" (30W)	30K 3000K	15D 15 Degree	W White	RM RDM	UNV 100-277V
	35.43" (45W)	40K 4000K	30D 30 Degree	GR Grey	PP Pixel per	
	46.85" (60W)	50K 5000K	15*40D 15*40 Degree		FT Foot	
		57K 5700K				
		60K 6000K				
		TW Tunable White 2700K-6500K				
		WD Warm Dim 3000K-1800K				



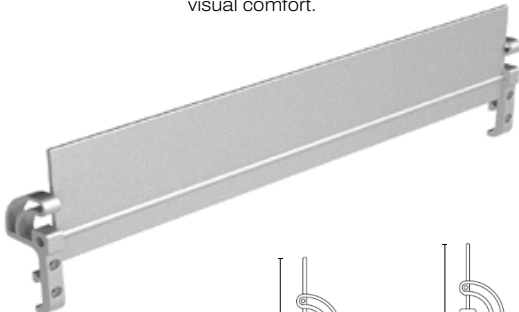
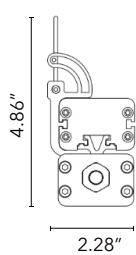
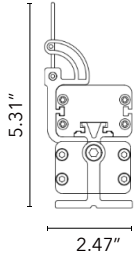
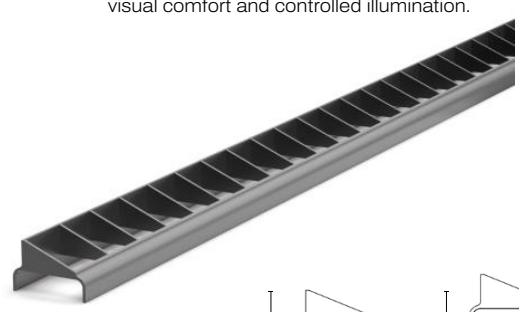


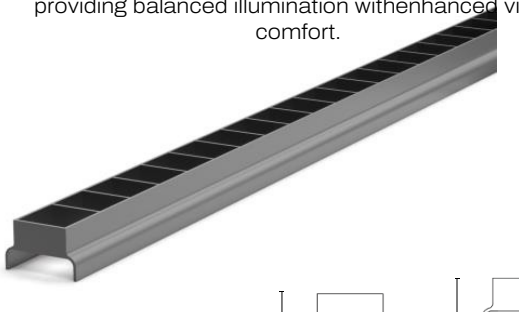


Project:

Type:




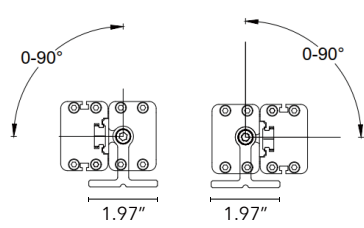



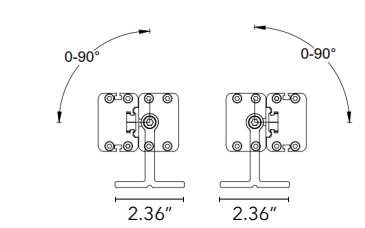



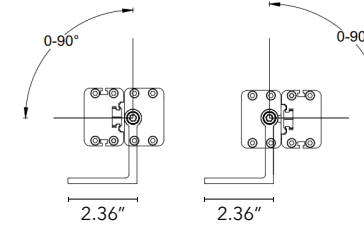
Qty:

DIMENSIONS & VIEWS


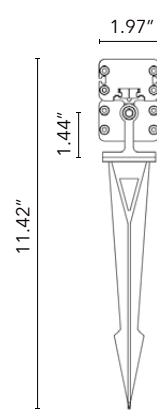
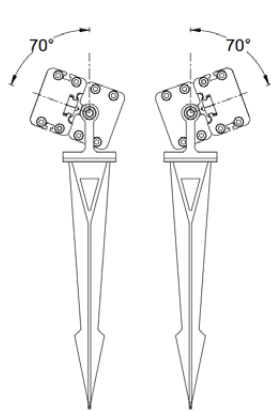
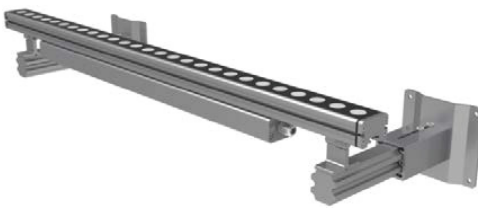


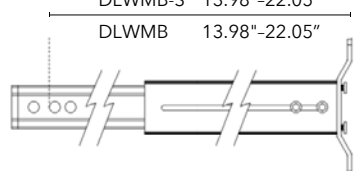
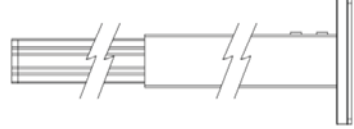
Anti-glare Accessories (order separately)

	Anti-Glare Shield	
<p>16.14" / 23.82" / 35.43" / 46.85"</p> <p>Designed for LineaPro RGBW to reduce glare and refine visual comfort.</p>   	<p>16.14" / 23.82" / 35.43" / 46.85"</p> <p>Asymmetric anti-glare louver designed for LineaPro to enhance visual comfort and controlled illumination.</p>   	<p>16.14" / 23.82" / 35.43" / 46.85"</p> <p>Symmetric anti-glare louver for LineaPro RGBW 4IN1, providing balanced illumination with enhanced visual comfort.</p>   

Mounting Accessories (order separately)

<p>Adjustable mounting option for applications requiring angle variation. Allows rotation up to 180° for precise aiming.</p>    	<p>Adjustable mounting option for applications requiring angle variation. Allows rotation up to 180° for precise aiming.</p>    	<p>L-shape adjustable mounting option for applications requiring angle adjustment. Rotates up to 180° for precise positioning.</p>    
--	--	--

Anti-glare Accessories (order separately)

<p>Adjustable mounting option for landscape lighting applications.</p>   	<p><b>Wall Mount Option</b> For applications requiring wall installation using a 5.91"–9.06" extension arm. <small>*This option must be ordered together with the fixture, as it includes the required mounting brackets for secure installation.</small></p>   	<p><b>Wall Mount Option</b> For applications requiring wall installation with a 13.98"–22.05" extension arm.</p>  <p>DLWMB-S 13.98"-22.05" DLWMB 13.98"-22.05"</p> 
--	---	---

Project:

Type:

Qty:

DIMENSIONS & VIEWS

Typical Wiring Schematic

<p><b>Leading Wiring Option One</b></p> <p>T-joint with integrated power and data cables for streamlined connection.</p>	<p><b>Leading Wiring Option Two</b></p> <p>Integrated power and data cables for efficient and clean wiring.</p>
<p><b>Leading Wiring Option Three</b></p> <p>T-joint with customizable bare wire lengths.</p> <p>*Consult factory for bespoke cable lengths.</p>	
<p><b>Power Injection Option One</b></p> <p>Power injection with integrated power-leading cable for reliable performance.</p>	<p><b>Power Injection Option Two</b></p> <p>T-joint with customizable bare wire lengths.</p> <p>*Consult factory for bespoke cable lengths.</p>
<p><b>Extension Cable:</b></p>	<p><b>DMXTerminator (IP66):</b></p>