


SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)


| | |
|--|---------------------|
| Nominal Capacity (At 1mA/20°C/68°F/2.0V Cut-Off) | 1.65 Ah |
| Open Circuit Voltage (At 20°C/68°F) | 3.67 V |
| Nominal Voltage (At 1mA/20°C/68°F) | 3.59 V |
| Maximum Continuous Current | 60 mA |
| Maximum Pulse Current Capability | 150 mA |
| Rated 1 Sec. Pulse Capability (To 3V) | 30 mA |
| Operating Temperature Range | -55 ~ 85 °C |
| Weight | 11.3 g (0.398oz) |
| Anode Surface Area | 9.7 cm ² |
| Volume | 5.5 cm ³ |
| Diameter (Max) | 14.5 mm |
| Height (Max) | 33.5 mm |

DIMENSIONS IN MM

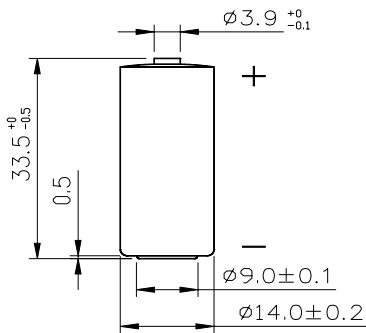


WARNING
Fire, Explosion And Severe Burn Hazard.
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F(100°C), Incinerate
Or Expose Contents To Water


Voltage (V) DISCHARGE CHARACTERISTICS AT +20°C

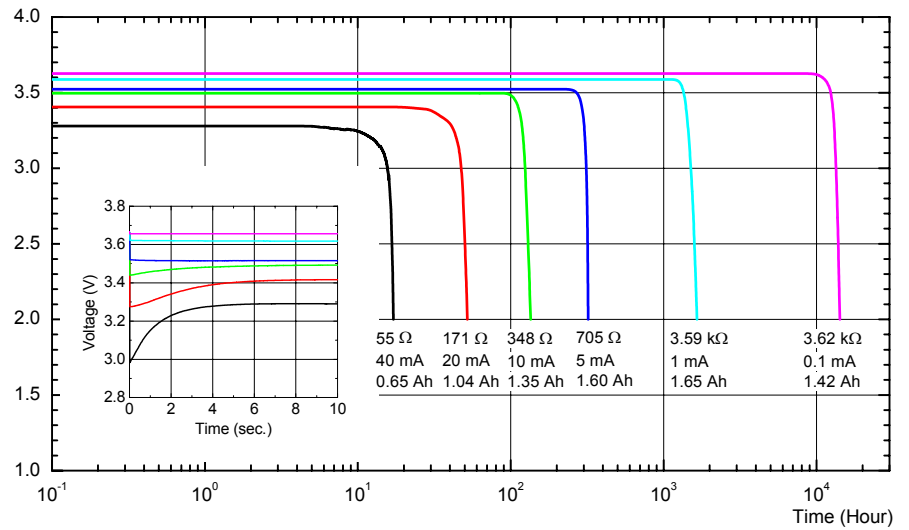


Capacity (Ah) CAPACITY vs. CURRENT

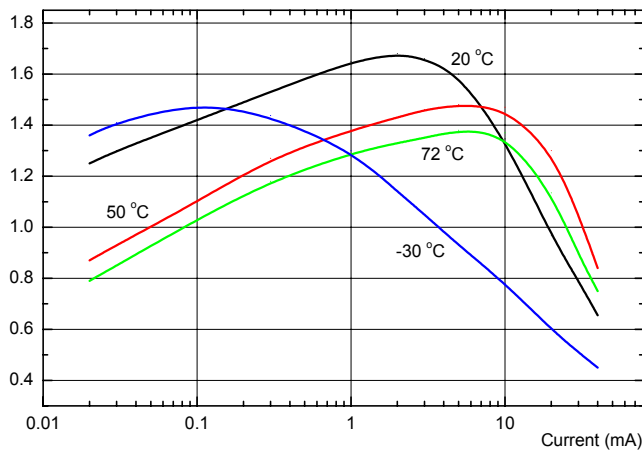


Voltage (V) OPERATING VOLTAGE

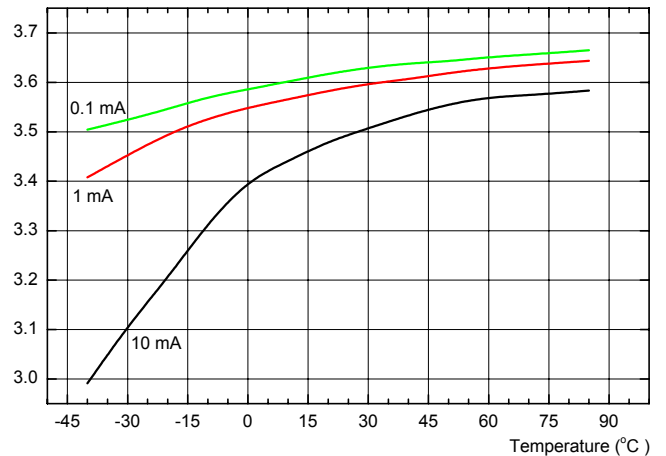

1. STD Terminal

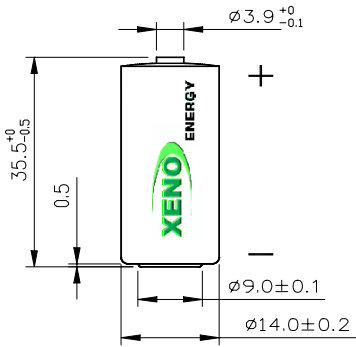


2. Connector




Connector Type :
Tyco
Molex
JST
Berg
Tamiya


3. AX Terminal

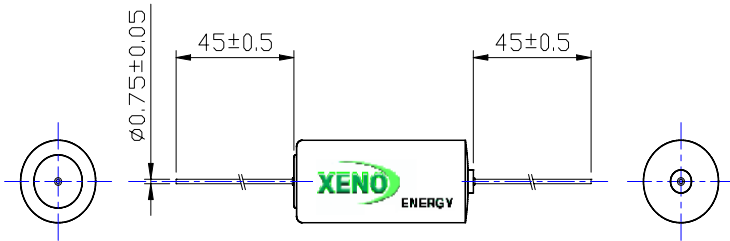


4. T1 Terminal

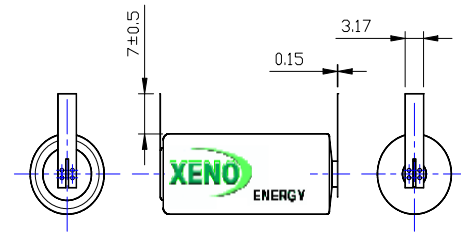


5. T2 Terminal

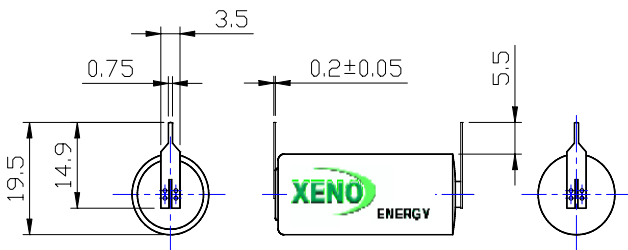

6. T3 Terminal

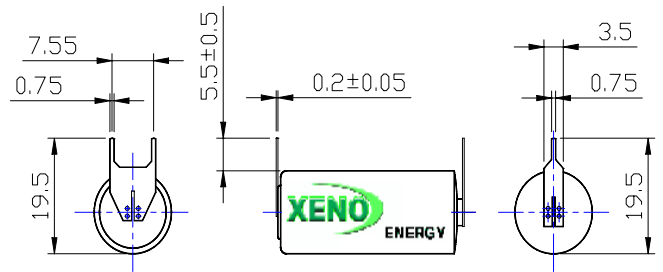

7. T3 EU Terminal

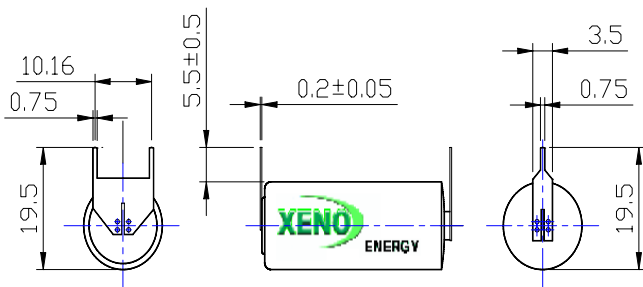

8. T3 EU/R Terminal

