

Harvest the Sunshine

560W




JA SOLAR

JAM72D30 MB

p-type Double Glass Bifacial Modules

Premium Cells




MBB Half-Cell
Technology

24%
Up To

Cell Conversion
Efficiency


Premium Modules



Higher output
power




More reliable,
more stable power generation




Less shading
effect



Lower temperature
coefficient

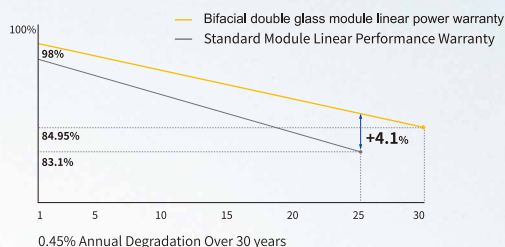

12-year product
warranty




30-year linear power
output warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing




DEEP BLUE 3.0

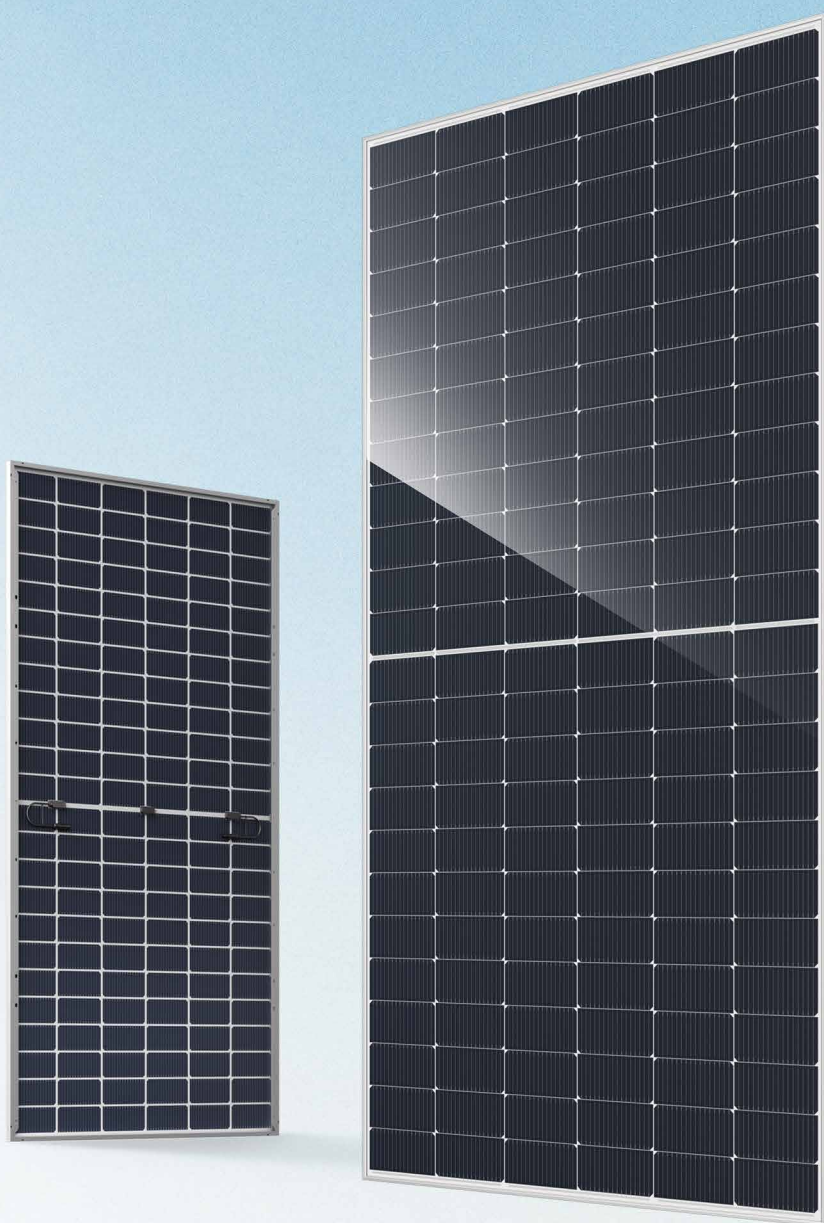

JAM72D30 MB

p-type Double Glass Bifacial Modules

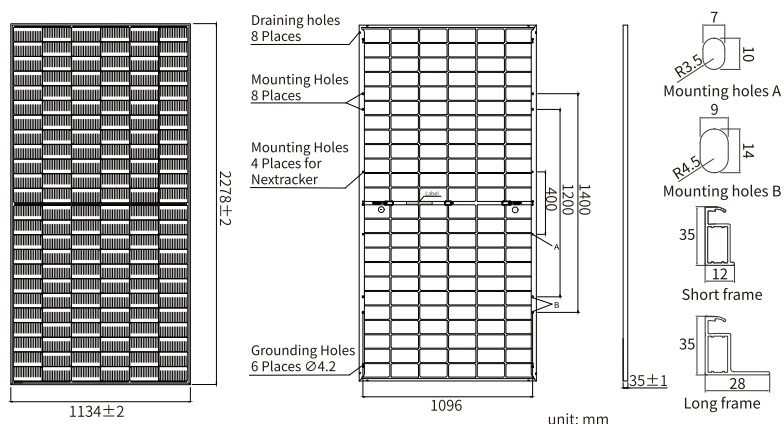

MECHANICAL PARAMETERS

Cell	Mono
Weight	31.8kg
Dimensions	2278±2mm×1134±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/MC4-EVO2
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-) Landscape: 1300mm(+)/1300mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	31pcs/Pallet, 589pcs/40HQ Container

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D30 -535/MB	JAM72D30 -540/MB	JAM72D30 -545/MB	JAM72D30 -550/MB	JAM72D30 -555/MB	JAM72D30 -560/MB
Rated Maximum Power(P _{max}) [W]	535	540	545	550	555	560
Open Circuit Voltage (V _{oc}) [V]	49.45	49.60	49.75	49.90	50.02	50.15
Maximum Power Voltage(V _{mp}) [V]	41.47	41.64	41.80	41.96	42.11	42.27
Short Circuit Current(I _{sc}) [A]	13.79	13.86	13.93	14.00	14.07	14.14
Maximum Power Current(I _{mp}) [A]	12.90	12.97	13.04	13.11	13.18	13.25
Module Efficiency [%]	20.7	20.9	21.1	21.3	21.5	21.7
Power Tolerance	0~+3%					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.


ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM72D30 -535/MB	JAM72D30 -540/MB	JAM72D30 -545/MB	JAM72D30 -550/MB	JAM72D30 -555/MB	JAM72D30 -560/MB
Rated Max Power(P _{max}) [W]	572	578	583	589	594	599
Open Circuit Voltage(V _{oc}) [V]	49.80	49.93	50.03	50.21	50.31	50.45
Max Power Voltage(V _{mp}) [V]	41.47	41.65	41.78	41.95	42.11	42.26
Short Circuit Current(I _{sc}) [A]	14.76	14.83	14.91	14.98	15.05	15.13
Max Power Current(I _{mp}) [A]	13.80	13.88	13.95	14.03	14.10	14.18
Irradiation Ratio (rear/front)	10%					

* For NextTracker installations, maximum static load please take compatibility approve letter between JA Solar and NextTracker for reference.

** Bifaciality=P_{max}, rear/Rated P_{max}, front

CHARACTERISTICS

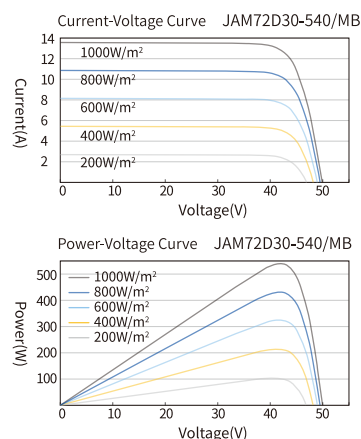

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front	5400Pa(112 lb/ft ²)
Maximum Static Load, Back	2400Pa(50 lb/ft ²)
NOCT	45±2°C
Bifaciality*	70%±10%
Safety Class	Class II
Fire Performance	UL Type 29/Class C



Headquarters

No. 8 Building, Nuode Center, No.1 Courtyard, East Auto Museum Road,
Fengtai District, Beijing
Tel: +86 10 6361 1888 Fax: +86 10 6361 9999
E-mail: sales@jasolar.com marketing@jasolar.com www.jasolar.com

Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.

Version No. : Global-EN-20250320A