

ROLL-UP DOOR ORDER FORM

Date:	Ship To (if different):
Sold To:	
Contact:	P.O. Numbers:
Phone:	QTY:
Email:	
	Fit - Hinges shipped loose on one side to accommodate customer trim-dowr iize - Manufactured to size, fully assembled
□ Steel Clad Roll-Up Door Includes e-coat/powder coat hinges with 2" nylon roller removable end hinges steel clad panels, rubber head stee-coat/powder coat spring assisted steel lock, one-pie bottom seal, 7 x 19 cables, stainless steel rivets, e-copowder coat heavy duty lift handle and pull strap assem TRACK/OPERATOR □ INCLUDE track and operator □ INCLUDE track only □ INCLUDE operator only SIDE SEALS (may ship separately) What is your track space? (see back) □ STANDARD Rubber □ Dual Durometer □ Frame Mounted Brush	routed interlocking tongue and groove panels, aluminum head seal retainer, zinc-plated spring assisted steel lock, galvanized bottom seal retainer, 7 x 19 cables, zinc-

CONVERTING FROM A SWING DOOR?

DON'T FORGET A CONVERSION KIT | for 9" header

☐ for 7" header (Dry Freight Standard)




ROLL-UP DOOR ORDER FORM


DIMENSIONS

Please provide dimensions (in inches). All new doors are made for net opening width, NOT wall-to-wall dimensions. If you have special conditions, please indicate or attach an additional sketch for engineer review.

ALL DIMENSIONS SHOULD BE IN .25" INCREMENTS

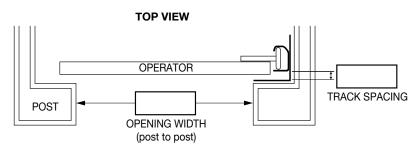


THERE ARE TWO WAYS TO PROVIDE DIMENSIONS



NOTE: If providing opening width and height, we will: ADD WIDTH: 2.25" for door opening widths SUBTRACT HEIGHT: .50" to opening height

OPENING HEIGHT (bottom of header to sill) FLOOR

YOUR DOOR(S) WILL BE MANUFACTURED AT:



THIS BOX MUST BE COMPLETED BEFORE ORDER CAN BE PROCESSED. All dimensions should be in .25" increments.

Customer Authorized Signature
Must be signed before order can be processed

Date

NON-CATALOG DOORS ARE NON-RETURNABLE AND CANNOT BE CANCELED

AND CANNOT BE CANCELED.	
OFFICE USE ONLY: P/N	
Multiple part numbers may be necessary.	
SPECIAL INSTRUCTIONS	