



MixCal™ THERMOSTATIC MIXING VALVE

CALEFFI
Hydronic Solutions



Protecting the system to protect your water



PRODUCT FEATURES

■ Large mixing chamber and thermostatic cartridge:

Enables precise mixed temperature stability during inlet temperature and pressure variations.

■ Installation flexibility:

½" - 1" sweat, NPT, Press, PEX crimp and PEX expansion union connections. Check valves and temperature gauge optional.

■ Anti-scale polymer materials:

Inhibits scaling on internal sliding surfaces, assuring stable temperature control and long life.

■ Tamper-proof adjustment setting lock:

Prevents tampering of the mixed water temperature setpoint.

■ Peroxide-cured seals:

Stands up to treated water, chlorine or chloramines.

■ Precisely manufactured:

Finely machined threads and double o-rings for smooth knob adjustment.

Stable mixed temperature performance with durable construction for long life

Due to the unique mixing chamber design, Caleffi MixCal™ produces very stable mixed water temperature as inlet temperatures and pressures vary. Scale formation is minimized via sliding surfaces constructed of an anti-scale polymer, thus guarding against seizing or erratic mixed temperatures. O-ring seals made from durable peroxide-cured EPDM resist wear from common water treatment additives such as chlorine and chloramines.

PRODUCT RANGE - MixCal™



(C) with inlet port check valves.

* Complies with ASTM F 1807.

**Complies with ASTM F 1960.

ASSE 1017


NSF 372

SIZES	OUTLET TEMP GAUGE	CODE				
		NPT	SWEAT	PRESS	PEX Crimp*	PEX Expansion**
1/2"	--	521400A(C)	521409A(C)	521406A	521407A(C)	521408A(C)
	√	521410A(C)	521419A(C)	521416A	521417A(C)	521418A(C)
3/4"	--	521500A(C)	521509A(C)	521506A(C)	521507A(C)	521508A(C)
	√	521510A(C)	521519A(C)	521516A(C)	521517A(C)	521518A(C)
1"	--	521600A(C)	521609A(C)	521606A	521607A(C)	521608A(C)
	√	521610A(C)	521619A(C)	521616A	521617A(C)	521618A(C)


PERFORMANCE

MAX. WORKING PRESSURE	200 psi (14 bar)
SETTING TEMPERATURE RANGE	85 — 150°F (30-65°C)
TOLERANCE	±3°F (±2°C)
MAX. HOT WATER INLET TEMP.	200°F (93°C)
MIN. FLOW FOR STABLE PERFORMANCE	1.0 GPM (4 L/min)

CONSTRUCTION

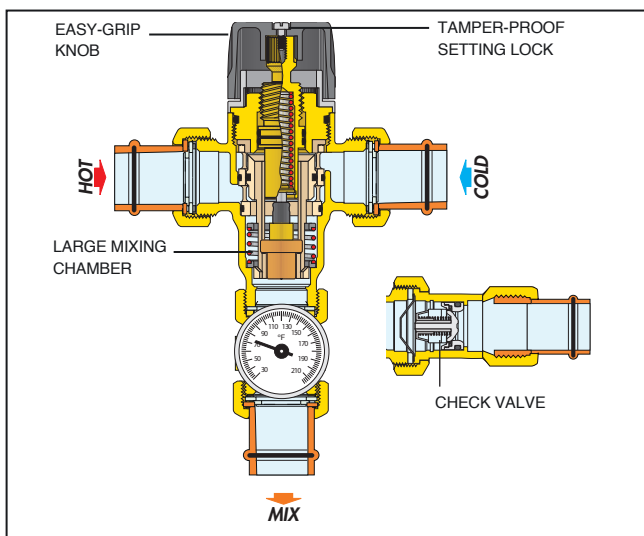

APPLICATION DIAGRAM

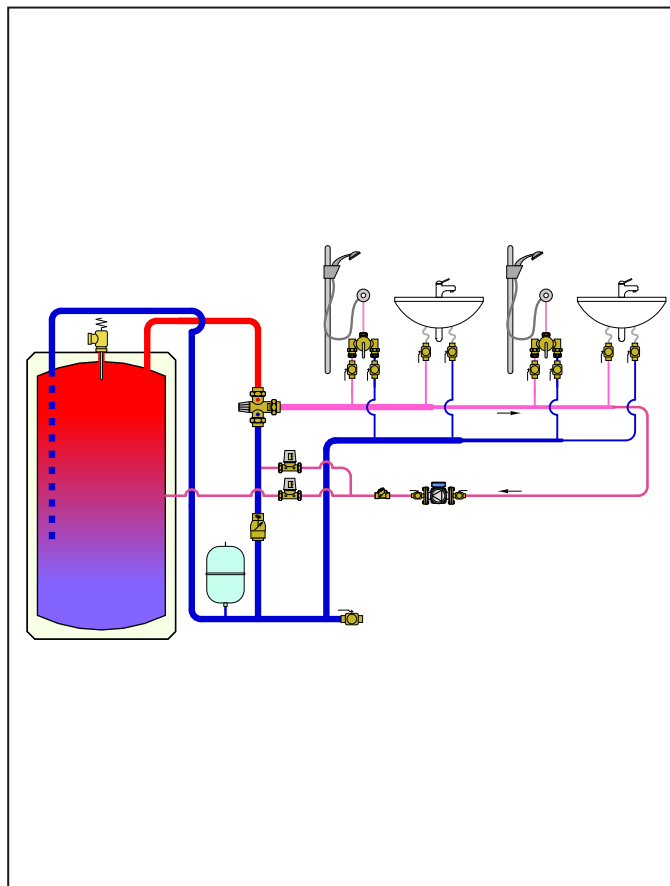

Caleffi Partner:



ONLINE
CATALOG

CALEFFI
Hydronic Solutions

03617-19 NA

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi North America, Inc.
sales@caleffi.com · www.caleffi.com
© Copyright 2019 Caleffi North America, Inc.