




ADJUSTABLE SWIVEL RING HANGERS

Fig. 151 & 151F SWIVEL RING HANGER

Fig. 151 PRE-GALVANIZED

Fig. 151F PRE-GALVANIZED
WITH FELT LINING

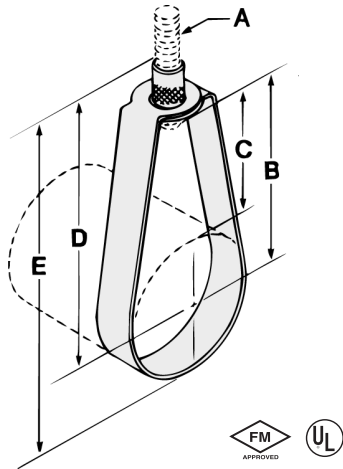

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut, allows for vertical adjustment after installation. Fig. 151F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved for all sizes. Complies with Federal Specification A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

MATERIAL: Low carbon steel

ORDERING: Specify pipe size and figure number.


Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
2 ¹ / ₂	1 ¹ / ₂	2 ³ / ₄	1 ¹ / ₄	3 ¹¹ / ₁₆	5 ¹ / ₈	600	.33
3	1 ¹ / ₂	3 ¹ / ₈	1 ¹ / ₈	4	5 ⁷ / ₈	600	.35
3 ¹ / ₂	1 ¹ / ₂	3 ⁵ / ₈	1 ¹ / ₂	4 ⁵ / ₁₆	6 ⁵ / ₈	600	.37
4	5 ⁵ / ₈	3 ⁷ / ₈	1 ¹ / ₄	4 ¹⁵ / ₁₆	7 ¹ / ₈	1000	.48
5	5 ⁵ / ₈	4 ³ / ₈	1 ³ / ₈	5 ⁵ / ₈	8 ¹ / ₂	1000	.57
6	3 ³ / ₄	5 ⁵ / ₁₆	2	6 ¹ / ₁₆	10 ¹ / ₈	1250	1.06
8	3 ³ / ₄	6 ¹⁵ / ₁₆	2 ⁵ / ₈	8 ⁵ / ₁₆	12 ⁷ / ₈	1250	1.32

Note: If ordering Fig. 151F felt lined hangers for pipe sizes of 3¹/₂" or under, order the next largest size to allow for the thickness of the felt lining.

Fig. 152 & 154 COPPER TUBING SWIVEL RING

Fig. 152 COPPER COLOR
EPOXY FINISH

Fig. 154 COPPER COLOR EPOXY
FINISH WITH PVC COATING

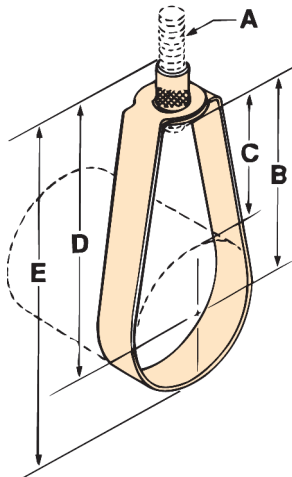

FUNCTION: Designed for the suspension of non-insulated stationary copper tubing. The knurled insert allows for vertical adjustment after installation. The PVC coating on Fig. 154 protects the tubing from contact with the metal surface of the hanger.

APPROVALS: Complies with Federal Specification A-A-1192A (Type 10) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

MATERIAL: Low carbon steel

ORDERING: Specify tube size and figure number.

Tube Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1 ¹ / ₂	3 ³ / ₈	1 ¹³ / ₁₆	1 ¹ / ₂	2 ¹¹ / ₁₆	3	300	.08
3 ³ / ₄	3 ³ / ₈	1 ⁵ / ₈	1 ³ / ₁₆	2 ¹ / ₂	2 ¹⁵ / ₁₆	300	.08
1	3 ³ / ₈	1 ⁹ / ₁₆	1	2 ⁹ / ₁₆	3	300	.08
1 ¹ / ₄	3 ³ / ₈	1 ⁵ / ₈	1 ⁵ / ₁₆	2 ¹ / ₂	3 ³ / ₁₆	300	.09
1 ¹ / ₂	3 ³ / ₈	1 ¹¹ / ₁₆	7 ⁷ / ₈	2 ⁹ / ₁₆	3 ³ / ₈	300	.09
2	3 ³ / ₈	2 ⁷ / ₁₆	1 ³ / ₈	3 ⁵ / ₁₆	4 ³ / ₈	300	.11
2 ¹ / ₂	3 ³ / ₈	2 ¹³ / ₁₆	1 ¹ / ₂	3 ⁷ / ₈	5 ⁹ / ₁₆	525	.26
3	3 ³ / ₈	3 ¹ / ₈	1 ⁹ / ₁₆	4 ³ / ₁₆	5 ³ / ₄	525	.28
3 ¹ / ₂	1 ¹ / ₂	3 ¹ / ₂	1 ¹¹ / ₁₆	4 ⁹ / ₁₆	6 ³ / ₈	525	.33
4	3 ³ / ₈	3 ³ / ₄	1 ¹¹ / ₁₆	4 ¹³ / ₁₆	6 ¹⁵ / ₁₆	650	.33
5	1 ¹ / ₂	4 ¹ / ₈	1 ⁹ / ₁₆	5 ³ / ₁₆	7 ¹³ / ₁₆	1000	.56
6	1 ¹ / ₂	4 ⁵ / ₈	1 ⁹ / ₁₆	5 ¹¹ / ₁₆	8 ¹⁵ / ₁₆	1000	.65