

Pro-Poly™ Coupler Fitting



PECP2 SERIES

ITEM # SUBMITTED: _____

JOB NAME: _____

LOCATION: _____

ENGINEER: _____

CONTRACTOR: _____

PO #: _____

TAG: _____

APPLICATION

The Pro-Poly™ Poly Coupler Fitting is used join together 2 MDPE Gas pipes of the same size, this includes the MDPE portion of a rigid riser.

INSTALLATION

Product installation and system testing shall be in accordance with all applicable local codes and the Pro-Poly Installation Guide.

MATERIALS

Nut and Main Body: Polypropylene

O-Ring: Nitrile

Spacer: Nylon

Grip Ring: Acetal

Stiffener: Acetal

SPECIFICATIONS

APPROVED GASES: **LP (PROPANE) & NATURAL GAS**

MAX OPERATING PRESSURE: **125 PSIG**

OPERATING TEMPERATURE RANGE: **-20° F— 180° F**

STANDARDS

Codes: NFPA 54, ICC Codes [IFGC, IRASTM F1924-10218

C, IPC, IMC], UPC, UMC

Standards: ASTM F1924-10218

Listings: IAPMO File # 12802

Part Number Definition:

PECP2-## ##C = Coupler Fitting

01 = 1" 0114 = 1-1/4"


34 = 3/4" 02 = 2"

PECP2-34C = 3/4" Coupler

PECP2-01C = 1" Coupler

PECP2-0114C = 1-1/4" Coupler

PECP2-02C = 2" Coupler

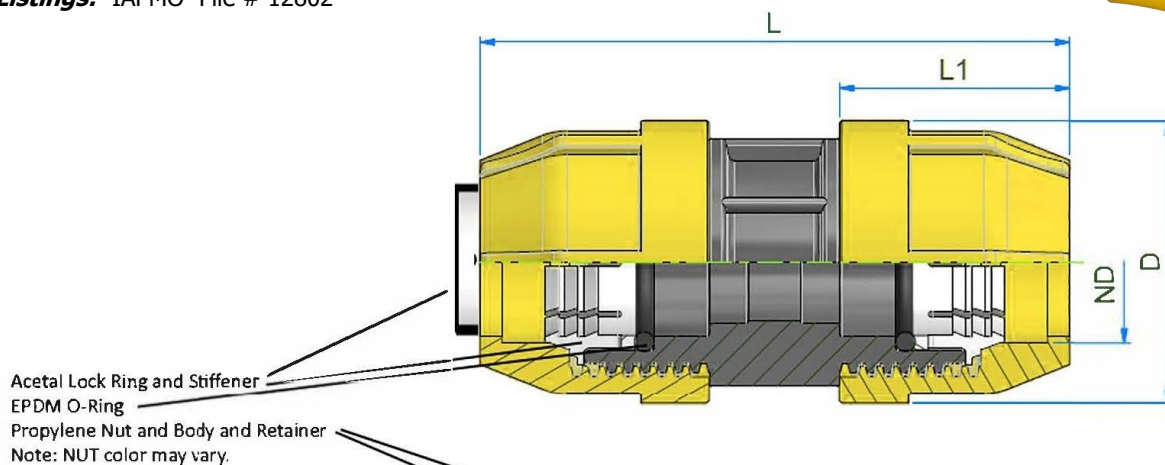

Rev. 3.23

Pro-Flex™
Traditional CSST

FlakJacket™
Arc-Resistant CSST

HearthMaster™
Fireplace & Log Lighter
Valves, Bars, etc.

Pro-Poly™
Underground Gas
Piping System



Pro-Flex, LLC • P: 877.798.6291 • F: 765-798-6139 • E: sales@proflexcsst.com