
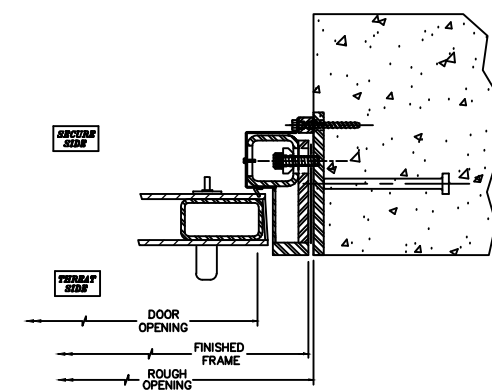



**HORIZONTAL CLEAR OPENING**

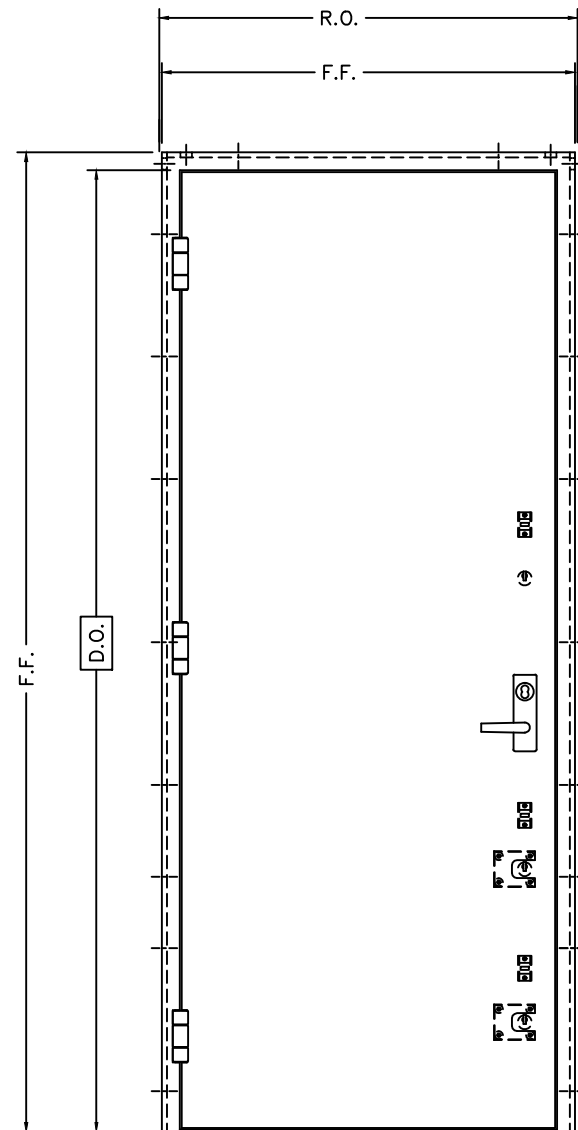

**TYPICAL FRAME JAMB SECTION - WITH EMBED - 2X SCALE**

## HOP-2133 (FIRE) 60 MINUTE FE/BR OPAQUE FIRE DOOR

- A.F.F. = ABOVE FINISHED FLOOR
- CUST. = CUSTOMER
- D.O. = DOOR OPENING
- EXT. = EXTERIOR
- F.F. = FINISHED FRAME
- INT. = INTERIOR
- LOC. = LOCATION
- No. = NUMBER
- PO. = PURCHASE ORDER
- QTY. = QUANTITY
- R.O. = ROUGH OPENING
- V.O. = VISION OPENING
- WO. = WORK ORDER

**ROSS MODEL No. HOP-2133 FIRE**  
**DOS MODEL No. GDO-60R-ROS-01F**

ITEM	QTY.	PART NO.	DESCRIPTION
3	1	60MIN OP 800	SUBFRAME ASSEMBLY
2	1	60MIN OP 200	L-FRAME ASSEMBLY AND WELD
1	1	60MIN OP 100	DOOR ASSEMBLY AND WELD

		SCALE		<b>ROSS TECHNOLOGY CORP.</b> <b>ARCHITECTURAL SECURITY</b> <b>LEOLA, PA. 17540</b>	
TOLERANCES	ANGULAR (DEG/MIN)	± 0'30"			
	LINEAR (FRAC)	± 1/16			
	LINEAR (DEC)	.X	± .06		
		.XX	± .03		
		.XXX	± .015		
DRAWN BY	CHKD BY	CNC NO.	TITLE		
			HOP-2133 60 MIN. FE/BR/OPAQUE SINGLE FIRE DOOR		
DATE	DATE	DISK #	DWG. NO.	REV	
			HOP-2133 (FIRE) CAD		