


AKSEL MD

Load Capacity (lbs.)
60-150*

Shelf Depth Range (in.)
7-10**

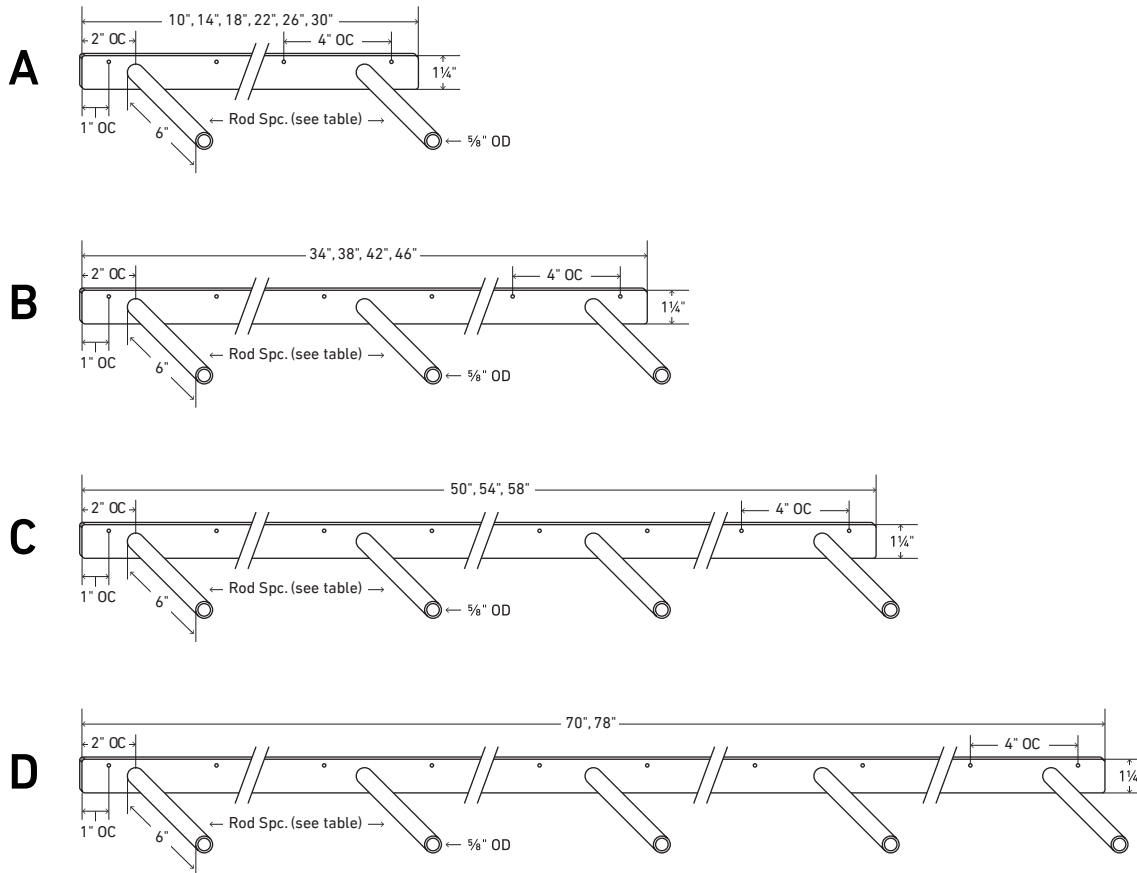

About Aksel MD

- Back bar is 1/4" thick, hot-rolled steel
- Screw holes are set 1" OC from each end and continue 4" OC down the length of the bracket
- Countersunk screw holes are 3/16" outside diameter (OD)
- Rods are inset 2" on center (OC) from left and right bar end
- Request custom rods a 1 1/2" shorter than shelf depth
- Supports up to 45 lbs. per solid rod when correctly mounted*

WARNING: All brackets must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

*

Request custom rod length for shelf depth applications below 7".

**

Drawings are representations only and not to scale.

© Shelfology 2018

Figure	Rod Count	Load	Back bar Length	Rod Spacing (OC)	Shelf Length	Shelf Depth	Shelf Thickness
--------	-----------	------	-----------------	------------------	--------------	-------------	-----------------

A	2	90 lbs	10"	6"	12"- 16"	5"- 10"	1 1/2"- 2"
A	2	90 lbs	14"	10"	16"- 20"	5"- 10"	1 1/2"- 2"
A	2	90 lbs	18"	14"	20"- 24"	5"- 10"	1 1/2"- 2"
A	2	90 lbs	22"	18"	24"- 28"	5"- 10"	1 1/2"- 2"
A	2	90 lbs	26"	22"	28"- 32"	5"- 10"	1 1/2"- 2"
A	2	90 lbs	30"	26"	32"- 36"	5"- 10"	1 1/2"- 2"

B	3	135 lbs	34"	15"	36"- 40"	5"- 10"	1 1/2"- 2"
B	3	135 lbs	38"	17"	40"- 44"	5"- 10"	1 1/2"- 2"
B	3	135 lbs	42"	19"	44"- 48"	5"- 10"	1 1/2"- 2"
B	3	135 lbs	46"	21"	48"- 52"	5"- 10"	1 1/2"- 2"

C	4	180 lbs	50"	15 3/8"	52"- 56"	5"- 10"	1 1/2"- 2"
C	4	180 lbs	54"	16 3/8"	56"- 60"	5"- 10"	1 1/2"- 2"
C	4	180 lbs	58"	18"	60"- 72"	5"- 10"	1 1/2"- 2"

D	5	225 lbs	70"	16 1/2"	72"- 80"	5"- 10"	1 1/2"- 2"
D	5	225 lbs	78"	18 1/2"	80"- 96"	5"- 10"	1 1/2"- 2"

CUSTOM BRACKETS ARE NO PROBLEM. EXPECT SAME INSANE RADNESS ACROSS THE BOARD. SERIOUSLY. CALL US. 949.244.1083



Get More Hardware & Ready To Hang Radness
Order Online at shelfology.com //
Email hello@shelfology.com //
Order Now 949.244.1083