


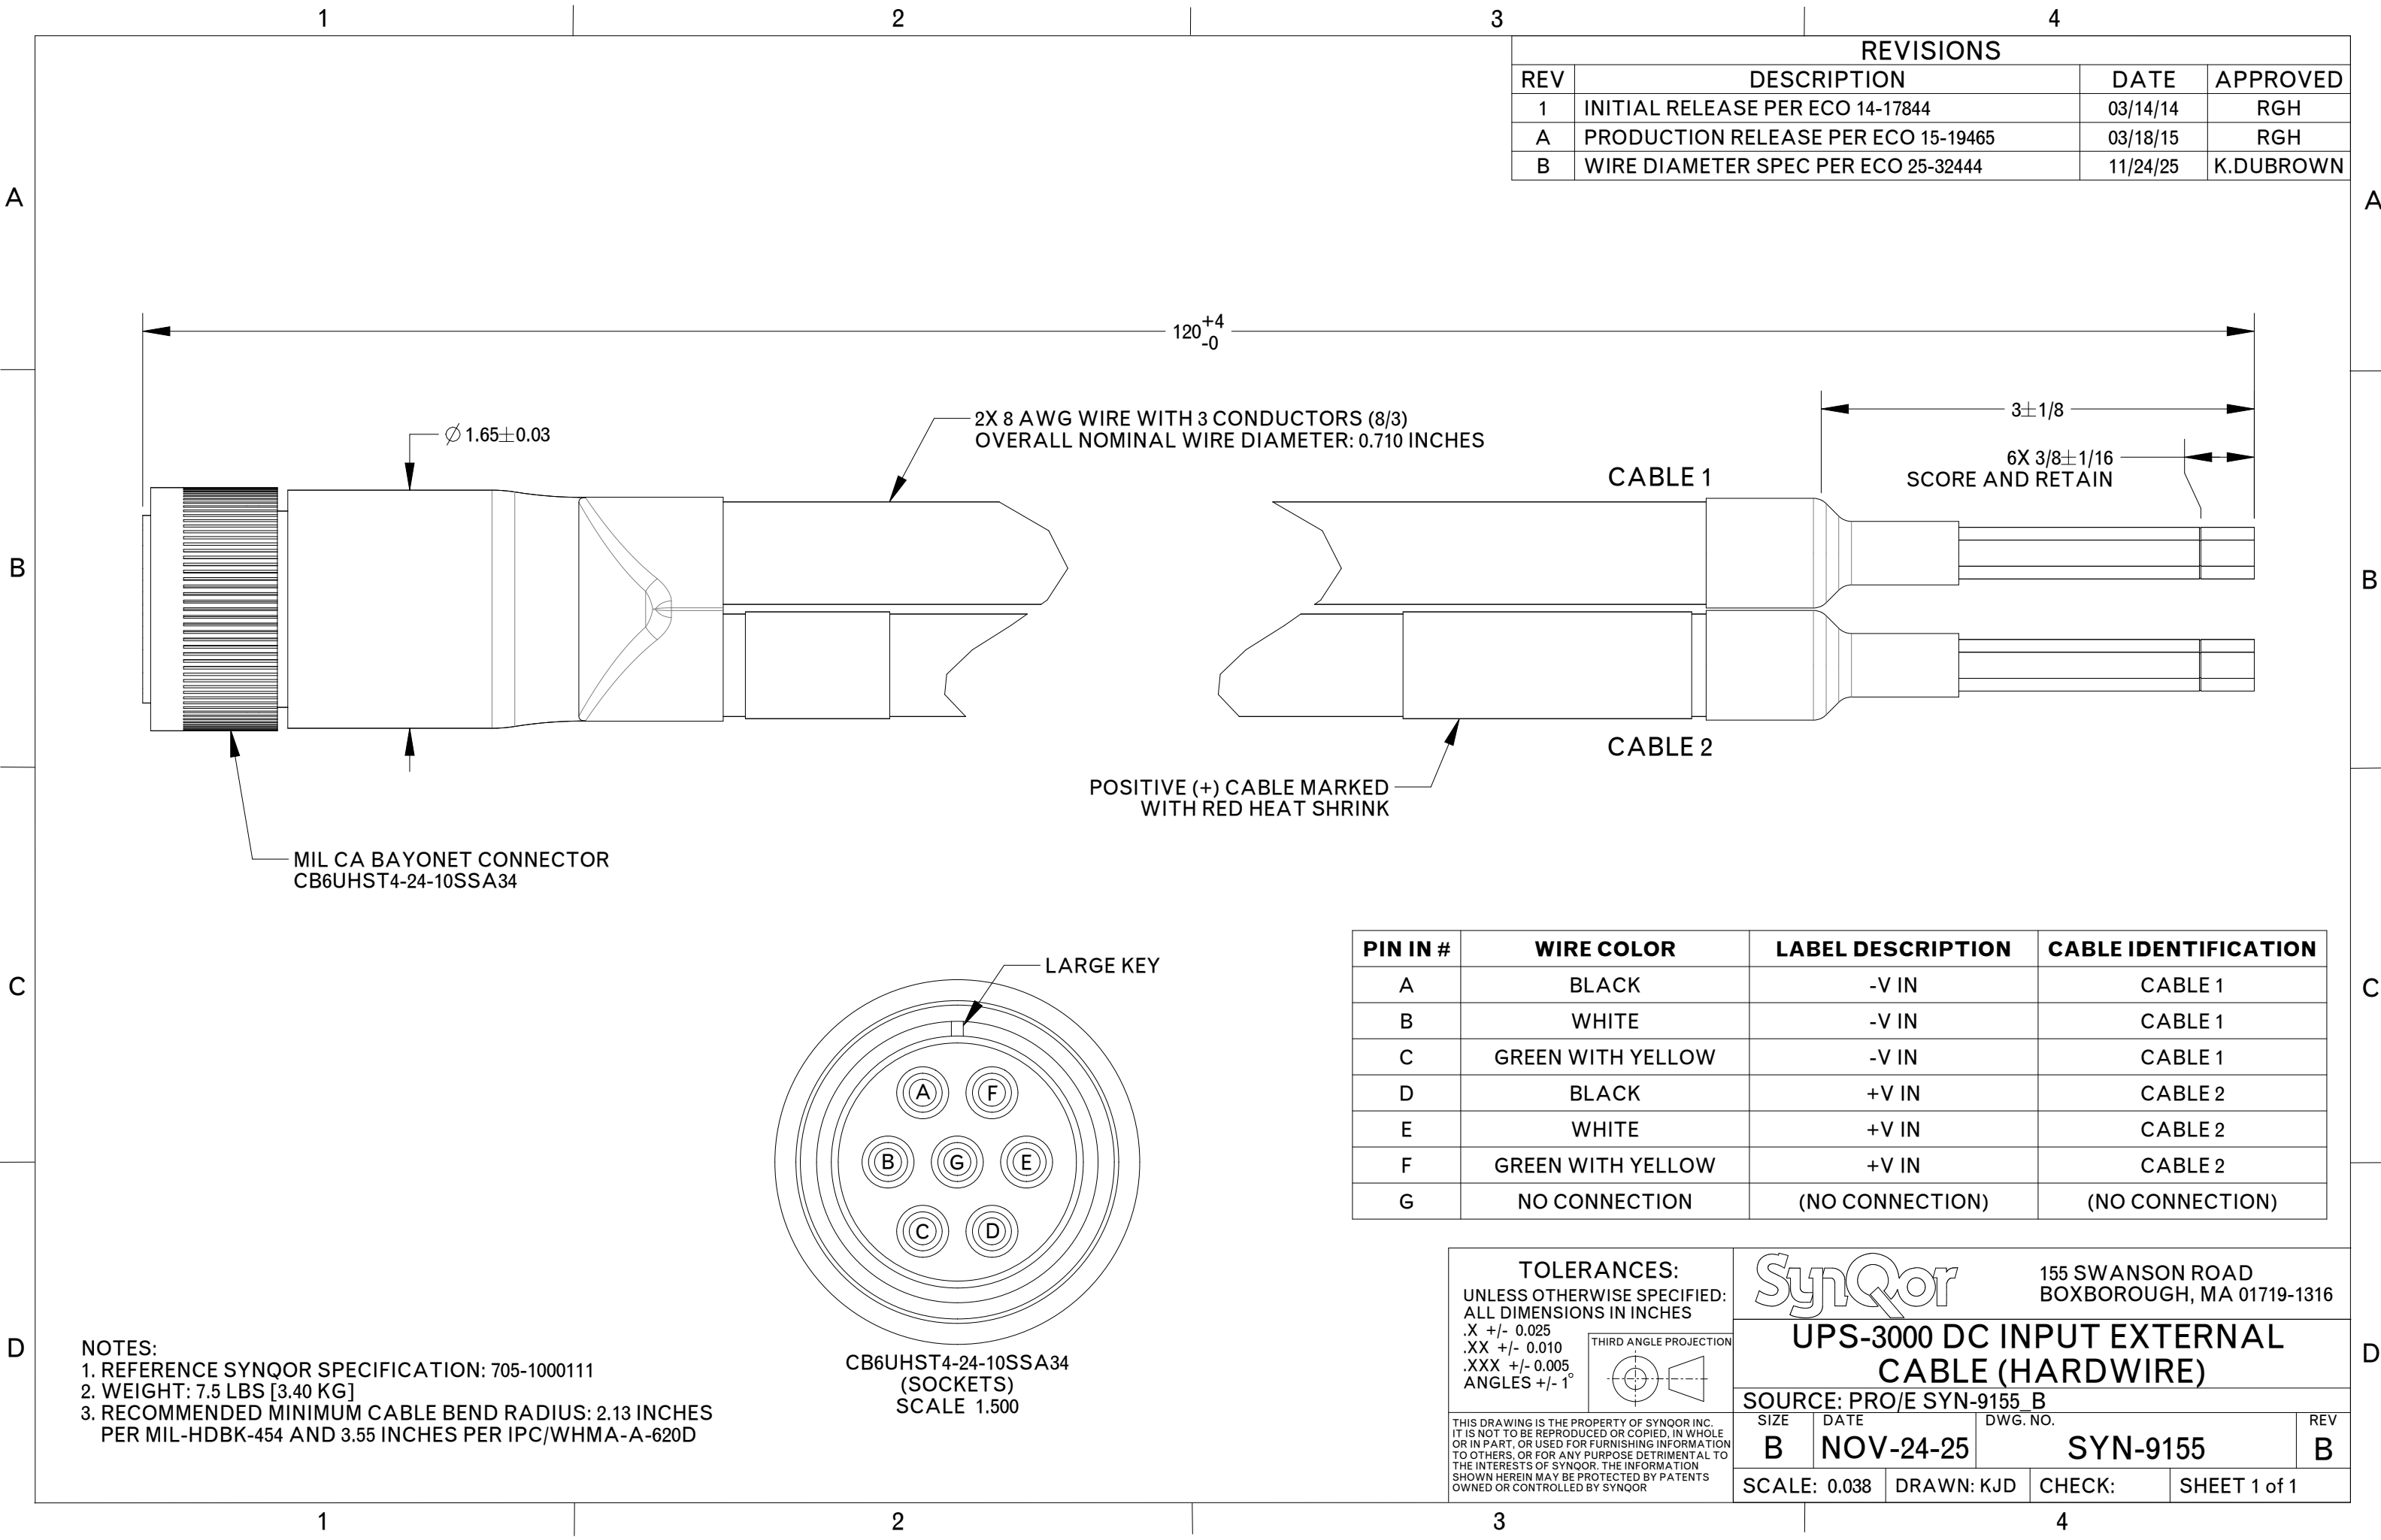

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE PER ECO 14-17844	03/14/14	RGH
A	PRODUCTION RELEASE PER ECO 15-19465	03/18/15	RGH
B	WIRE DIAMETER SPEC PER ECO 25-32444	11/24/25	K.DUBROWN

PIN IN #	WIRE COLOR	LABEL DESCRIPTION	CABLE IDENTIFICATION
A	BLACK	-V IN	CABLE 1
B	WHITE	-V IN	CABLE 1
C	GREEN WITH YELLOW	-V IN	CABLE 1
D	BLACK	+V IN	CABLE 2
E	WHITE	+V IN	CABLE 2
F	GREEN WITH YELLOW	+V IN	CABLE 2
G	NO CONNECTION	(NO CONNECTION)	(NO CONNECTION)

NOTES:
1. REFERENCE SYNQOR SPECIFICATION: 705-1000111
2. WEIGHT: 7.5 LBS [3.40 KG]
3. RECOMMENDED MINIMUM CABLE BEND RADIUS: 2.13 INCHES
PER MIL-HDBK-454 AND 3.55 INCHES PER IPC/WHMA-A-620D

CB6UHST4-24-10SSA34
(SOCKETS)
SCALE 1.500

TOLERANCES:
UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS IN INCHES
.X +/- 0.025
.XX +/- 0.010
.XXX +/- 0.005
ANGLES +/- 1°

THIRD ANGLE PROJECTION

THIS DRAWING IS THE PROPERTY OF SYNQOR INC. IT IS NOT TO BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, OR USED FOR FURNISHING INFORMATION TO OTHERS, OR FOR ANY PURPOSE DETRIMENTAL TO THE INTERESTS OF SYNQOR. THE INFORMATION SHOWN HEREIN MAY BE PROTECTED BY PATENTS OWNED OR CONTROLLED BY SYNQOR

SynQor 155 SWANSON ROAD
BOXBOROUGH, MA 01719-1316

**UPS-3000 DC INPUT EXTERNAL
CABLE (HARDWIRE)**

SOURCE: PRO/E SYN-9155_B

SIZE	DATE	DWG. NO.	REV
B	NOV-24-25	SYN-9155	B

SCALE: 0.038 DRAWN: KJD CHECK: SHEET 1 of 1