

Project:

Type:

Qty:



FEATURES



COCKATOO features a unique retractable light head with adjustable positioning and up to 355° horizontal rotation, providing versatile and dynamic lighting. Its well-engineered structure and quick-click installation mechanism make installation, removal, and maintenance simple and efficient. Available in round and square configurations, round models are offered in both trimmed and trimless options, while square models are available in trimmed only. Ideal for high-end residential and commercial lighting applications.



Offered in square and round, with both trimmed and trimless options




Standard CCTs 27K, 30K, 35K, 40K, TW, WD.




Black and White finish options

DIMENSIONS

10W

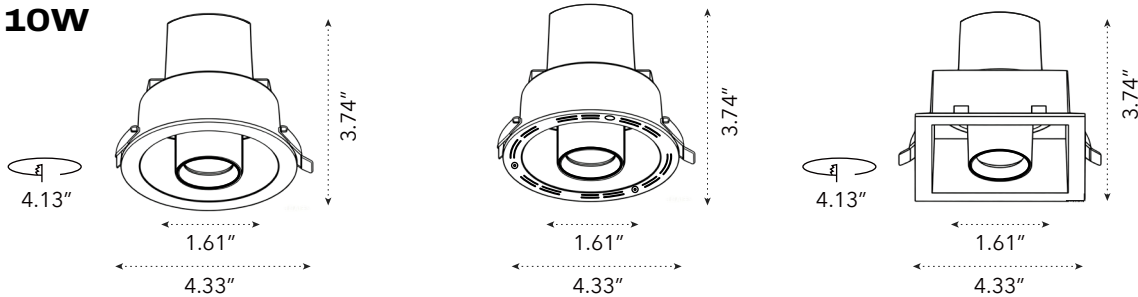

20W

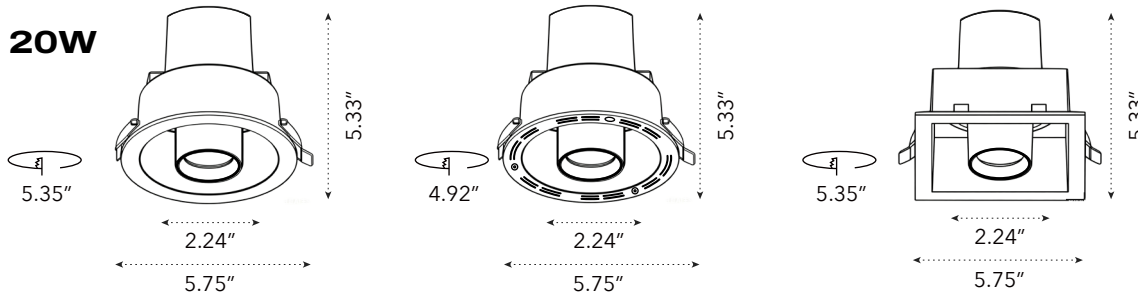

Input Voltage	120-277V AC
Wattage	10W / 20W
Delivered Lumens	758lm - 1656lm +/-5%
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K, 30K, 35K, 40K, TW, WD
CRI	>90Ra
Adjustability	15°/24°/36°
UGR	<19
Lamp Life	50,000 Hr
Environment	IP20
Heat Sink	Aluminum body with oxidized powder coating
Trim	Die-cast Aluminum
Operating Temp	-4°F to 104°F

Order Code

ORDER CODE EXAMPLE: CA2-57-T-27K-24D-WH-DAL-NC

SERIES	SIZE	TRIM	CCT	BEAM ANGLE	FINISH	DIMMING
CA2	41 1.61"	T Trimmed	27K 2700K	15D 15 Degree	WH White	ELV ELV/TRIAC Phase Cutting 3%
	57 2.24"	L Trimless	30K 3000K	24D 24 Degree	BK Black	D10 0-10V (100% - 1%)
		S* Square	35K 3500K	36D 36 Degree		DAL DALI-2 Dim to off 0.1%
		*Trimmed only	40K 4000K			
			TW Tunable White 2700K-6500K			
			WD Warm Dim 3000K-1800K			

INSTALLATION TYPE	EMERGENCY BACKUP
NC New Construction Tray	EM10 10W/90 Min
IC Insulation Contact	
AT/CP Airtight / Chicago Plenum	


Project:

Type:

Qty:

MOUNTING OPTIONS

NC - New Construction Frame-In Tray


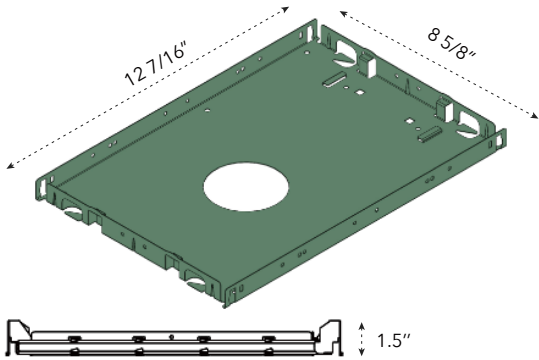


Standard bar hanger (included)
Mounting length 14 3/4" - 26".
Extension kit can be ordered separately.




Commercial bar hanger #1487
Butterfly and caterpillar brackets available


LED Driver Enclosure and Junction Box

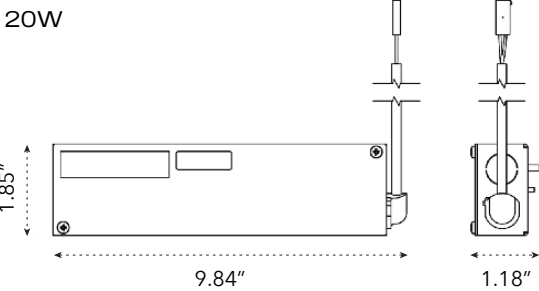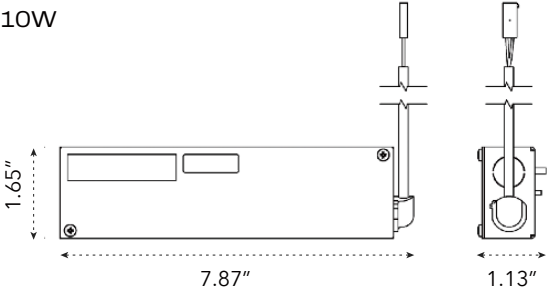

New Construction & Remodel Mounting

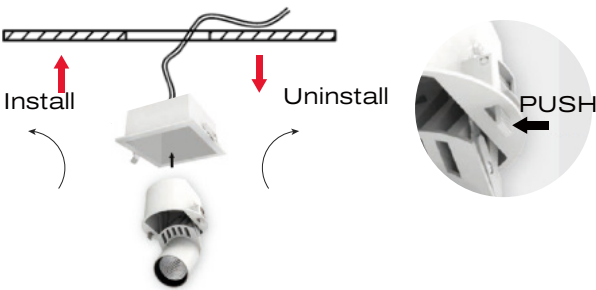

IC / Chicago Plenum / Airtight

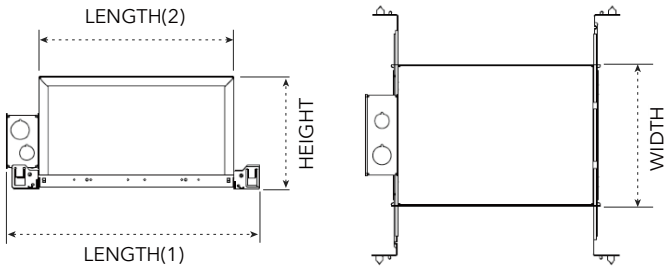

Length	Width	Height
11 3/4"	8 1/2"	6 3/4"

