


RoHS Compliant


REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	18.01.12	PROPOSAL		WAY

A
B
C
D

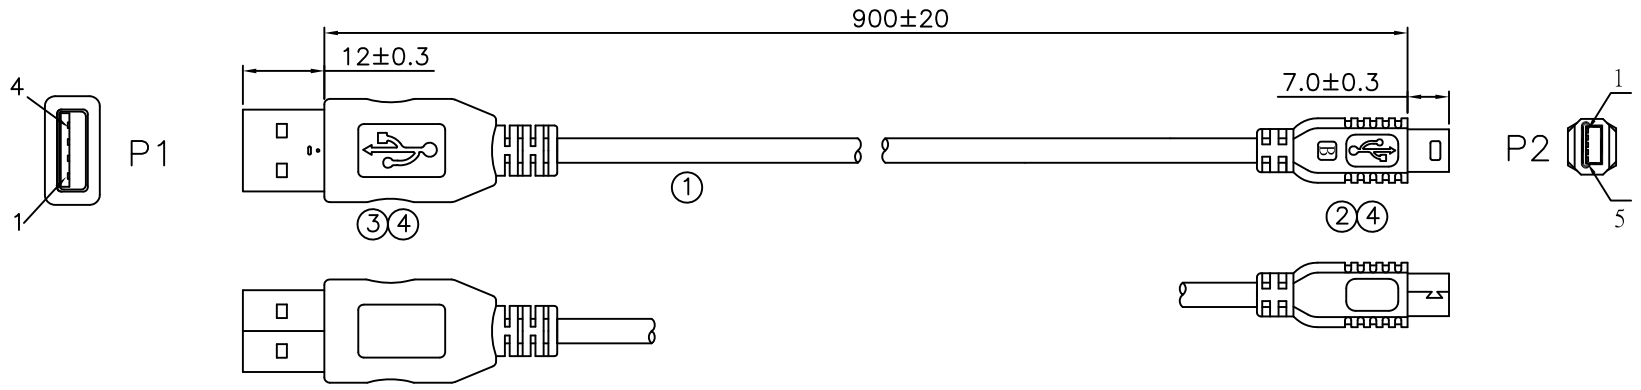

- NOTES:
- 1. P1 MODEL NUMBER: MCUB04-5M-0551.
 - 2. P2 MODEL NUMBER: MCUB05-5M-0669
 - 3. OPEN/SHORT TEST: 100%.
 - 4. CONDUCTOR RESISTANCE:3 ohm
 - 5. INSULATION RESISTANCE:10M ohm
 - 6. HI-POT TEST:300V DC

PIN ASSIGNMENT		
P1	COLOR	P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
SHELL	SHIELD	SHELL

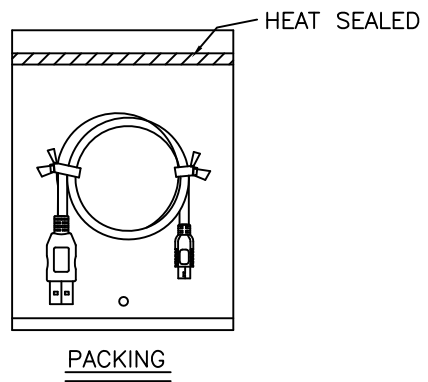

CUST P/N.: XX-XXX
G9904IE002-001

WIESON TECHNOLOGIES CO., LTD

④	PVC	45P PVC BLACK, (BC01)	AR	USB A PLUG TO MINI USB B PLUG			
③	CONNECTOR	USB A TYPE MALE: SOLDER TYPE, BLACK INSULATOR, NICKEL PLATED SHELL	1	DRAWN BY	WAY(WSC)	DRAWING NO.	G9904IE002-001
②	CONNECTOR	MINI USB 5P B PLUG,SOLDER TYPE,BLACK INSULATOR, PIN GOLD FLASH. SHELL:NI-PLATED.	1	CHECKED BY	TON	DRAWING SIZE	A4
①	CABLE	USB 2.0REV. UL2725 28AWG*1P+24AWG*2C +AL/MY +DRAIN+BRAID(65% Al-Mg) +PVC JACKET; COLOR:BLACK(BC01).	1	APPROVED BY	TOLIN	UNIT	mm
NO.	ITEM	DESCRIPTION	QTY	SORTING NO.	WSC	PAGE	1 OF 1