


ROLEC DH45

Ampco Pumps Company is proud to present the ROLEC DH45, a smaller, simpler version of the DH90 and DH250 dry hopping systems. Now breweries of any size can enjoy the many benefits of efficient and safe dry hopping. The DH45 uses an SBI blender to recirculate the fermenter, induce dry pellets and blend. This process maximizes pellet dispersion, flavor and aroma. Increased surface area and forced contact results in decreased tank-time and, in many cases, greater yield. An integrated CO₂ inlet on the funnel creates a "CO₂ blanket" over the hops and mitigates oxygen contact.

Simple, proven and cost effective dry hopping built in the U.S.A. specifically for the smaller brewer!

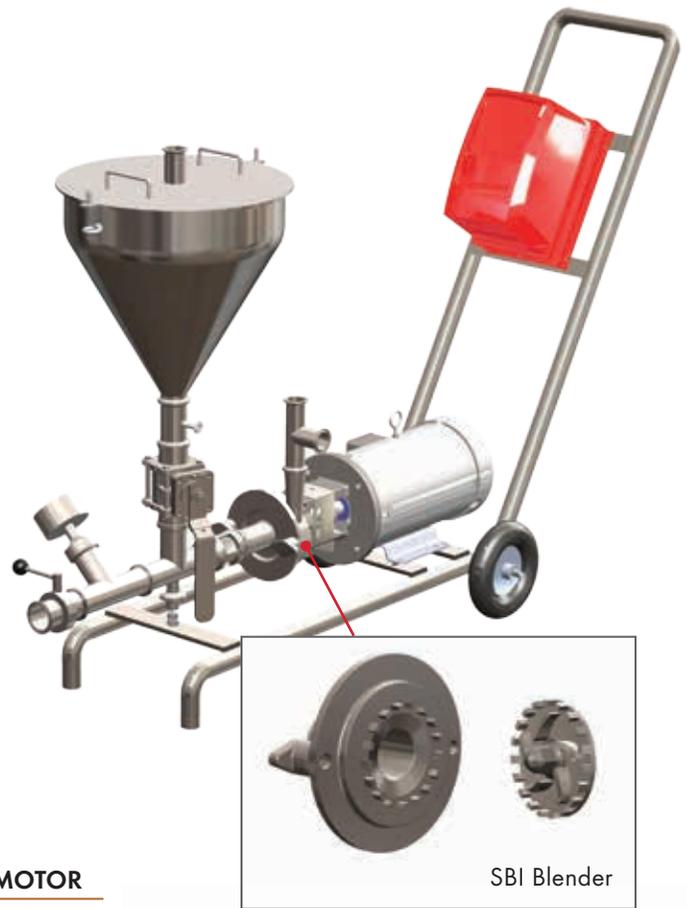

	PELLET CAPACITY	PUMP	RECIRCULATION /MIN	PORT SIZE	MOTOR
DH45	44 lbs / 20 kg	SBI-R10	2.9 bbls/ 3.4 hectoliters	2"x 1.5" DIN 50 x 40	5 hp/ 4 kW
DH90	88 lbs/ 40 kg	SBI-R10	2.9 bbls/ 3.4 hectoliters	1.5"/ DIN 40	5 hp/ 4 kW
DH250	264 lbs/ 120 kg	SBI-R20	3.7 bbls/ 4.3 hectoliters	2"/ DIN 50	10 hp/ 7.5 kW



Functional design under license of ROLEC PROZESS- UND BRAUTECHNIK GMBH, GERMANY, United States Patent no. 8,875,616



Suspended hop particles



Hop particles after settling



No additional CIP pump is required